




HEAVY DUTY DEEP CYCLE SERIES 4000

BATTERY TYPE	VOLTS	12	T12 250
DIMENSIONS			
LENGTH	391 MM	15 3/8	INCHES
WIDTH	178 MM	7	INCHES
HEIGHT	365 MM	14 3/8	INCHES
WEIGHT DRY	64 KG	140	LBS.
WEIGHT WET	44 KG	97	LBS.
CONTAINER CONSTRUCTION			
CONTAINER	POLYPROPYLENE		
COVER	POLYPROPYLENE		
HANDLES	ROPE		
PLATES PER CELL	9		
ELECTROLYTE RESERVE	ABOVE PLATES	51 MM	2 INCHES
DESIGN CRITERIA	7 YEAR WARRANTY	1300 CYCLES	10 YEAR LIFE
POSITIVE PLATE DIMENSION			
HEIGHT	254 MM	10	INCHES
WIDTH	143 MM	5.625	INCHES
THICKNESS	4.32 MM	0.170	INCHES
NEGATIVE PLATE DIMENSION			
HEIGHT	254 MM	10	INCHES
WIDTH	143 MM	5.625	INCHES
THICKNESS	3.05 MM	0.12	INCHES
SEPARATOR INSULATION	SEPARATOR THICKNESS 0.020" GLASS MAT	0.081 INCH	
TERMINALS	AUTOMOTIVE (FLAG IF SPECIFIED)		
COLD CRANK	CCA	0°F / -17.8°C	648
	MCA	32°F / 0°C	810
	RESERVE		435
	MINUTES AT 25A		
CAPACITY	20 HR RATE	200	
		CAP / AH	CURRENT / AMPS
CAPACITY AT THE 20 HOUR RATE	1.265 SP. GR.	200	10.0
CAPACITY AT THE 15 HOUR RATE	1.265 SP. GR.	188	12.5
CAPACITY AT THE 12 HOUR RATE	1.265 SP. GR.	178	14.8
CAPACITY AT THE 10 HOUR RATE	1.265 SP. GR.	170	17.0
CAPACITY AT THE 8 HOUR RATE	1.265 SP. GR.	160	20.0
CAPACITY AT THE 6 HOUR RATE	1.265 SP. GR.	148	24.7
CAPACITY AT THE 5 HOUR RATE	1.265 SP. GR.	140	28
CAPACITY AT THE 4 HOUR RATE	1.265 SP. GR.	130	33
CAPACITY AT THE 3 HOUR RATE	1.265 SP. GR.	118	39
CAPACITY AT THE 2 HOUR RATE	1.265 SP. GR.	102	51
CAPACITY AT THE 1 HOUR RATE	1.265 SP. GR.	72	72

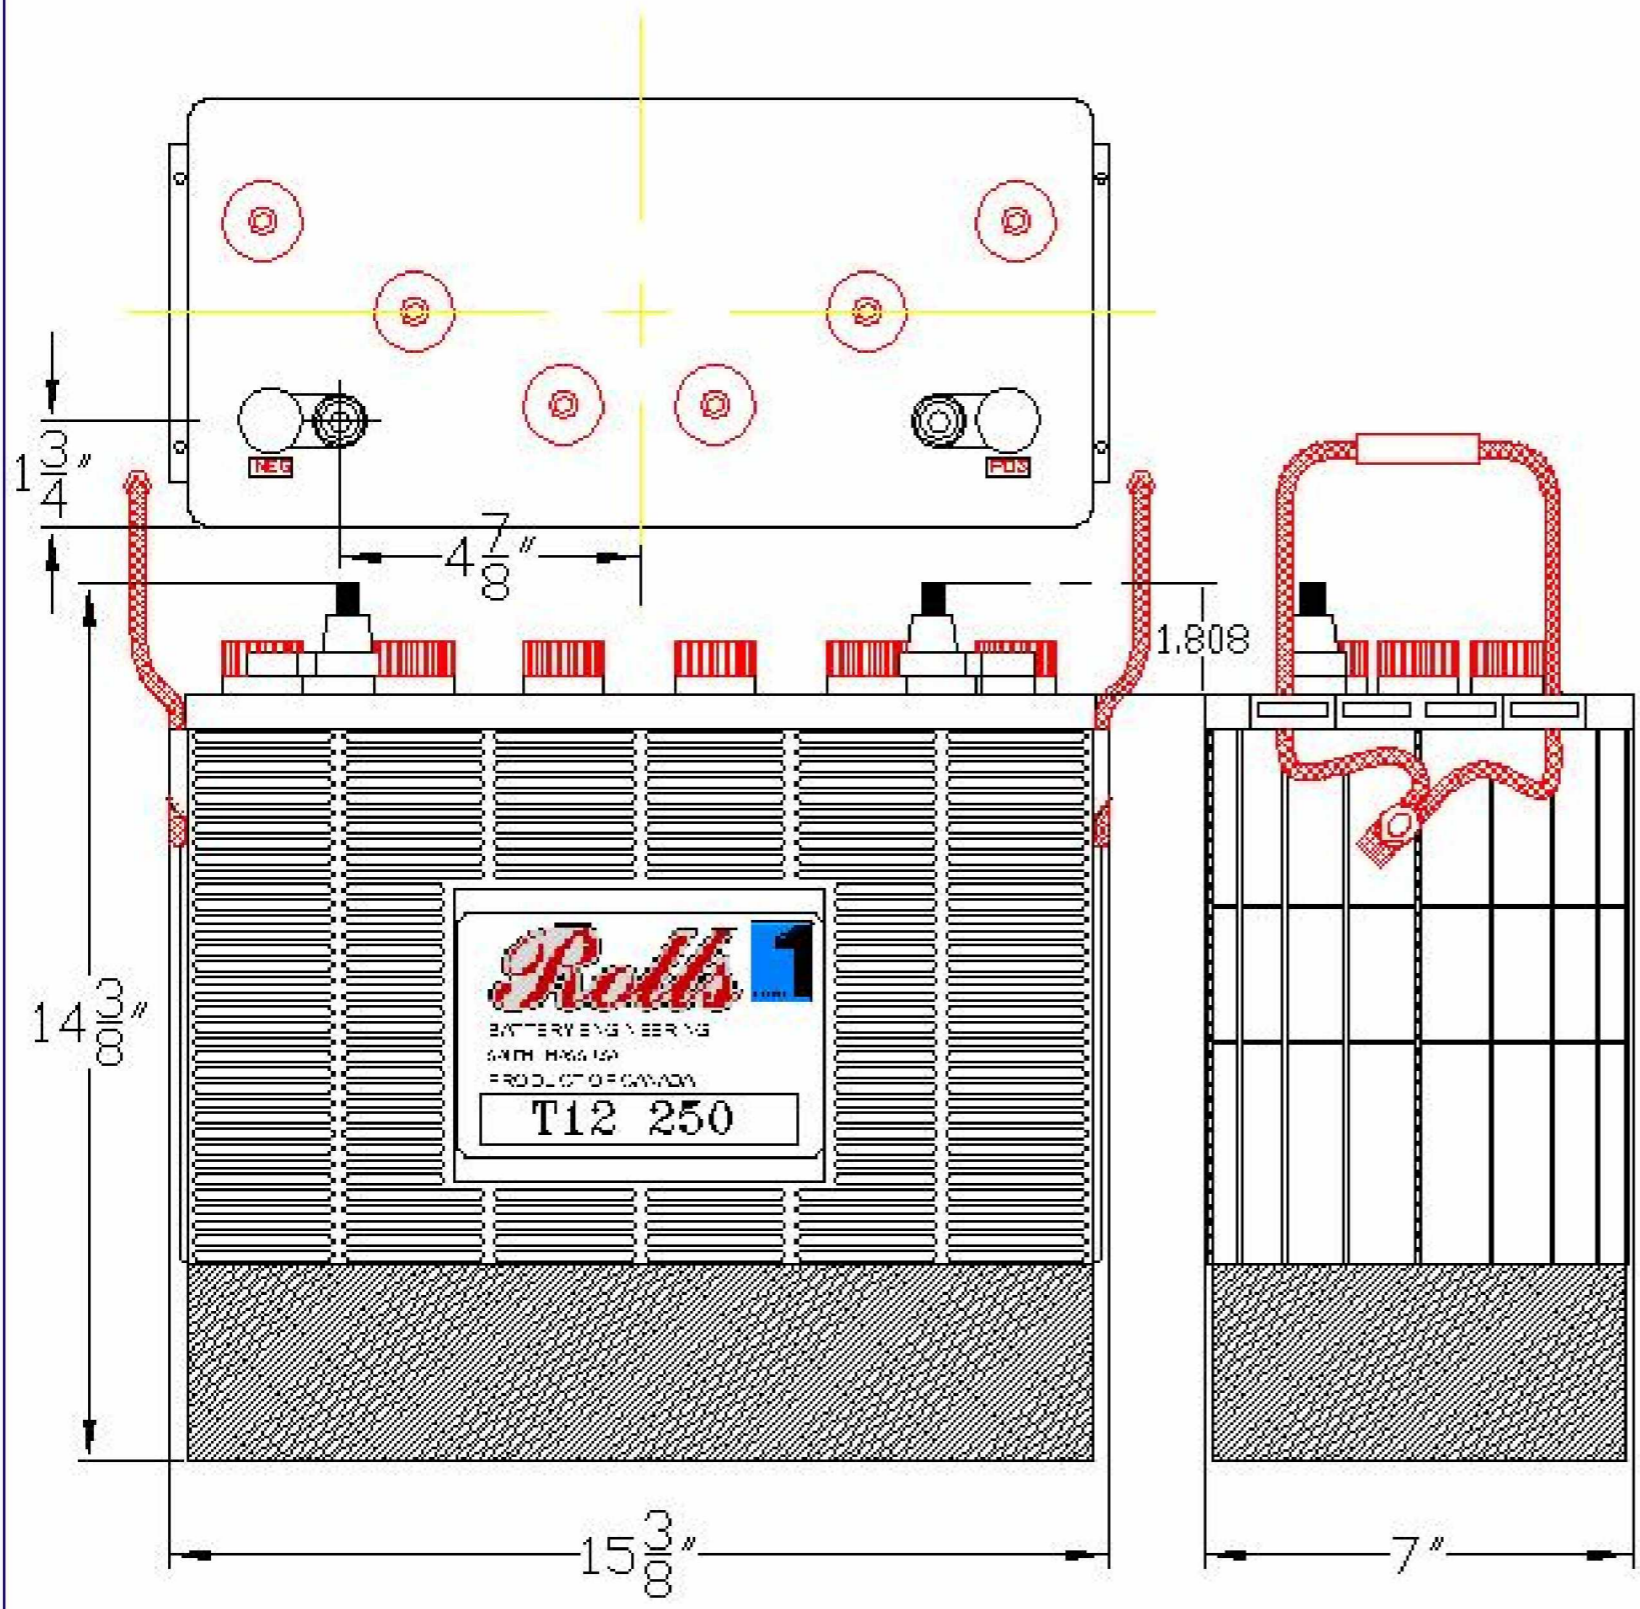

PART NUMBER: T12250
 WEIGHT WET: 140 LB / 64 KG
 WET DRY: 97 LB / 44 KG
 CAPACITY 154 AH 6 HR
 200 AH 20 HR
 RESERVE MIN@25A 435 MIN
 VOLTAGE: 12 V
 OVERALL DIMENSIONS: 15 3/8 X 7 X 14 3/8"

MAX HEIGHT WITH OPTIONAL HYDROCAPS 14 3/4"



BATTERY ENGINEERING
 SALEM, MASS, USA
 PRODUCT OF CANADA

TITLE: T12250

DESCRIPTION: 12V DEEP CYCLE SERIES 400/4000

CONTACT INFO:
 WEB: WWW.ROLLSBATTERY.COM
 E-MAIL: SALES@ROLLSBATTERY.COM
 PHONE: 1-800-681-9914

SCALE: 1" = 4" 8.5" X 11" JPEG NOT TO SCALE

Drawn by: S. WILES Approved By: D. SURRETTE

DATE: 5-FEB-01 REVISION 0

DRAWING NO.: DWG 046, BD-T12250